



Specialist Geomembranes

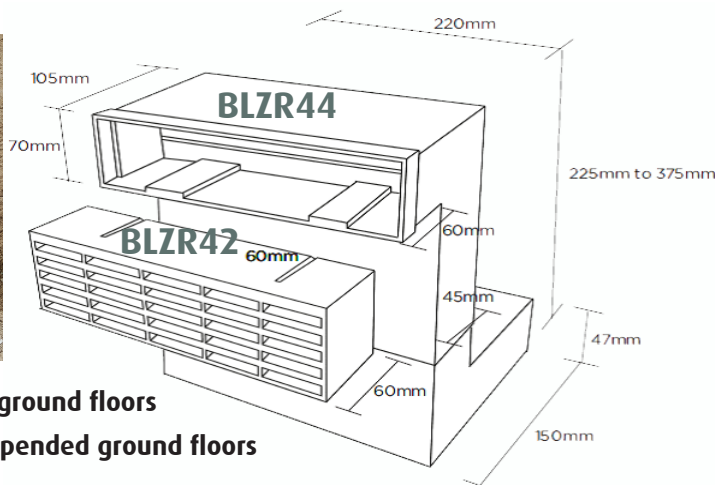

Technical Data Sheet

Telescopic Underfloor Vent

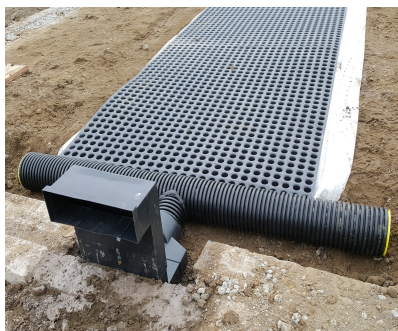

Tough, adjustable ventilator for ground floors

To provide ventilation below suspended ground floors

Features, Benefits & Quality

- Telescopic and adjustable for a step of 3, 4 or 5 brick courses
- Horizontal and vertical extension accessories available
- Equivalent of 6000mm² per unit
- Special grille included to prevent entry of vermin
- Durable, robust and totally resistant to decay
- Satisfies all NHBC requirements
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Complies with all relevant Building Regulations
- Meets all relevant British Standards

Materials & Colour Choice

- Manufactured by injection moulding in polypropylene
- Available in black only in packs of 20

Products in the System

- BLZR42 telescopic underfloor ventilator
- Matching airbrick and a range of accessories

Telescopic Gas Vent Outlets (BLZR42, BLZR44, BLZR40)

The combined units will allow ventilation outlets to either a sub floor void or via a range of adaptors to a venting layer. The BLZR42 vent units will achieve an airflow rate of 4.85 L/sec (17m³/hr) or equal to an equivalent area of 6,000m².

All airflow testing has been independently carried out by the BRE to BS EN 13141-1.

Installation Advice

Always use in conjunction with BLZR44 air brick.

The airbrick and upper front opening of the telescopic underfloor ventilator must be positioned above the finished external ground level - usually the same level as the ground level DPC.

The lower rear opening of the product must project down to the level of the underfloor void and must not be obstructed by the floor construction. A vertical extension sleeve is available to fit with this product if the standard 5 course step is not adequate.

The standard ventilator will fit into a cavity wall with an external leaf of 100-102.5mm, a minimum cavity width of 50mm and a cross cavity of 100mm. External and internal horizontal extension sleeves are available to accommodate thicker walls or wider cavities.



Butyl Products Ltd.

Lingfield House, 11 Radford Crescent, Billericay,
Essex, CM12 0DW, United Kingdom.

T: +44 (0) 1277 653 281

E: enquiries@butylproducts.co.uk W: butylproducts.co.uk

E: enquiries@butek-landline.co.uk W: butek-landline.co.uk

Butek Landline

Containment Solutions