

# Emergency Aid Camp Infrastructure




## Easy Up Berm



The **Easy Up Berm** is a secondary containment solution ideally suited for harsh conditions. The Easy Up Berm is designed to house storage containers of hazardous fuels, oils, chemicals and acids - up to a maximum capacity of 200,000 litres.

- Suitable for all petrochemicals in all climates with a temperature range between -32 and +65C
- Manufactured from hydrocarbon resistant nylon reinforced Landflex 100ES material
- Rapidly deployed by three people in less than one hour
- Easily transported and fully re-usable at different locations
- All berms are packed in an ISPM15 heat treated plywood case suitable for export

Standard Sizing	
Capacity (litres)	Size (m)
2,700	3.0 x 3.0 x 0.3 high
16,200	9.0 x 6.0 x 0.3 high
18,900	10.5 x 6.0 x 0.3 high
54,000	10.5 x 9.0 x 0.6 high
80,000	15.0 x 9.0 x 0.6 high
100,000	14.0 x 13.0 x 0.6 high
150,000	18.0 x 16.0 x 0.6 high
200,000	21.5 x 17.0 x 0.6 high

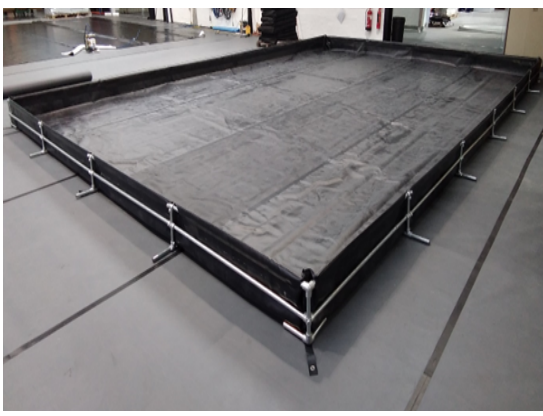

Our most commonly used Easy Up Berm sizes are shown in the table above. They are all competitively priced and readily available. Other sizes can be manufactured to meet customer specifications if required.



**Butyl Products Ltd.**  
Lingfield House, 11 Radford Crescent, Billericay, Essex,  
CM12 0DW, United Kingdom. T: +44 (0) 1277 653 281  
E: [enquiries@butylproducts.co.uk](mailto:enquiries@butylproducts.co.uk) W: [butylproducts.co.uk](http://butylproducts.co.uk)



# Emergency Aid Camp Infrastructure

All Easy Up Berms are ready for worldwide dispatch, and include all necessary tools, instruction manuals, spares and repair kits.

## Berm Frame

The common feature of the berm is the robust steel framework, which forms a module 1.5m wide x berm height with galvanised steel pipe and galvanised steel fittings to protect against surge pressure in the event of an incident. Each fitting is locked into position by an allen key (provided).

## Berm Material

The liner is fabricated from nylon reinforced Landflex 100ES material, 0.90mm thick.

- Tear strength 500 N
- Puncture resistance 1150 N
- Hydrostatic resistance 540 N

Landflex 90 is resistant to all petrochemicals and a wide range of acids and alkalis.



The Butyl Group Easy Up Berm is part of our range of fuel storage and distribution products.

Please see our website  
**[www.butylproducts.co.uk](http://www.butylproducts.co.uk)**  
to view our full range of equipment and capabilities.



## Butyl Products Ltd.

Lingfield House, 11 Radford Crescent, Billericay, Essex,  
CM12 0DW, United Kingdom. T: +44 (0) 1277 653 281

E: [enquiries@butylproducts.co.uk](mailto:enquiries@butylproducts.co.uk) W: [butylproducts.co.uk](http://butylproducts.co.uk)

